


■ Features

- 85~264Vac input with PFC
- **Global certificates in multi-fields** (ITE 62368-1, Industrial 61558-1/-2-16, 61010)
- **48mm** slim width
- High efficiency up to **96%** and no load power dissipation < **1.2W**
- Built-in **constant current** limiting circuit
- Current sharing up to **1920W (3+1)** for parallel use
- Protections: Short circuit / Overload / Over voltage / Over temperature
- Fanless design, cooling by free air convection
- Over voltage category III (**OVC III**)
- **-40~+70°C** wide range operation temperature (>+50°C derating)
- Operating altitude up to **5000 meters**
- Built-in DC OK relay contact
- Can be installed on DIN rail TS-35/7.5 or 15
- 3 years warranty

■ Description

The XDR-480E series is a 480W AC/DC economical ultra slim industrial DIN rail power. Key features of this series include a narrow 48mm casing, optimizing system installation space, and an ultra-wide input range of 85~264Vac suitable for global use. It boasts a maximum efficiency of 96% and a low standby power consumption <1.2W for energy savings and carbon reduction. It has built-in constant current, fanless design, a wide operating temperature range of -40 to +70°C (up to +50°C at full load); OVCIII compliance; parallel function capability up to 1920W; built-in DC OK signal. With comprehensive protection functions, complete safety certifications, and a 3-years warranty, the XDR-480E series is a compact, high-performance, and highly reliable DIN rail power supply.

■ Model Encoding

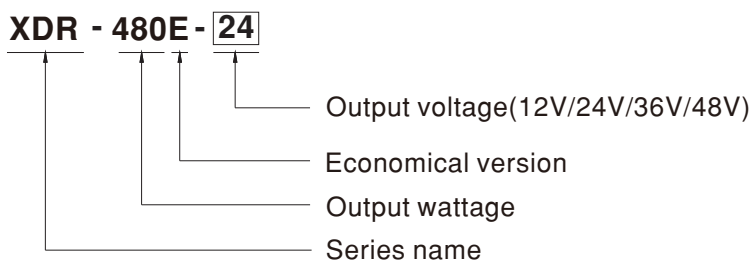

■ Applications

- Industrial control system
- Semiconductor fabrication equipment
- Factory automation
- Electro-mechanical apparatus
- Battery charger

■ GTIN CODE

MW Search: <https://www.meanwell.com/serviceGTIN.aspx>



480W AC/DC Economical Ultra Slim Industrial DIN Rail Power **XDR-480E** series


| SPECIFICATION | XDR-480E-12 | XDR-480E-24 | XDR-480E-36 | XDR-480E-48 |
|---|--|-------------|-----------------------|-------------|
| OUTPUT | | | | |
| DC VOLTAGE | 12V | 24V | 36V | 48V |
| RATED CURRENT | 30A | 20A | 13.3A | 10A |
| CURRENT RANGE | 0 ~ 30A | 0 ~ 20A | 0 ~ 13.3A | 0 ~ 10A |
| RATED POWER | 360W | 480W | 478.8W | 480W |
| RIPPLE & NOISE (max.) Note.2 | 100mVp-p | 120mVp-p | 150mVp-p | 150mVp-p |
| VOLTAGE ADJ. RANGE | 12 ~ 15V | 24 ~ 29V | 36 ~ 42V | 48 ~ 55V |
| VOLTAGE TOLERANCE Note.3 | ±2.0% | ±1.0% | ±1.0% | ±1.0% |
| LINE REGULATION | ±0.5% | ±0.5% | ±0.5% | ±0.5% |
| LOAD REGULATION | ±1.0% | ±1.0% | ±1.0% | ±1.0% |
| SETUP, RISE TIME | 1500ms, 150ms/230Vac 3000ms, 150ms/115Vac at full load | | | |
| HOLD UP TIME (Typ.) | 15ms/230Vac 15ms/115Vac at full load | | | |
| INPUT | | | | |
| AC VOLTAGE RANGE | 85 ~ 264Vac | | | |
| DC VOLTAGE RANGE | 120 ~ 370Vdc | | | |
| NO LOAD POWER CONSUMPTION (Typ.) | 1W @115Vac & 230Vac | | 1.2W @115Vac & 230Vac | |
| FREQUENCY RANGE | 47 ~ 63Hz | | | |
| POWDR FACTOR (Typ.) | PF>0.95/230Vac PF>0.98/115Vac at full load | | | |
| EFFICIENCY (Typ.) | 94% | 95.5% | 95.5% | 96% |
| AC CURRENT (Typ.) | 6A/115Vac 3A/230Vac | | | |
| INRUSH CURRENT (Typ.) | COLD START 15A/115Vac 30A/230Vac | | | |
| LEAKAGE CURRENT | <1mA / 240Vac | | | |
| PROTECTION | | | | |
| OVERLOAD | 105~130% rated output power | | | |
| | Hiccup mode when output voltage <30%, recovers automatically after fault condition is removed | | | |
| | Constant current limiting without shutdown within 30%~100% rated output voltage, recovers automatically after fault condition is removed | | | |
| OVER VOLTAGE | Max. 18V | Max. 35V | Max. 50V | Max. 63V |
| | Protection type : Hiccup mode, recovers automatically after fault condition is removed. | | | |
| OVER TEMPERATURE | Protection type : Shut down o/p voltage, recovers automatically after temperature goes down | | | |
| FUNCTION | | | | |
| PARALLEL (Droop Mode) | Up to 1920W Max (3+1) units; Please refer to Function Manual for more details | | | |
| DC OK RELAY CONTACT | Relay Contact Ratings (max.): 30Vdc/1A, 30Vac/0.5A resistive load | | | |
| ENVIRONMENT | | | | |
| WORKING TEMP. | -40 ~ +70°C (Refer to "Derating Curve") | | | |
| WORKING HUMIDITY | 20 ~ 95% RH non-condensing | | | |
| STORAGE TEMP., HUMIDITY | -40 ~ +85°C, 10 ~ 95% RH non-condensing | | | |
| TEMP. COEFFICIENT | ±0.03% /°C (0 ~ 50°C) | | | |
| VIBRATION | Component: 10 ~ 500Hz, 2G 10min./1cycle, 60min. each along X, Y, Z axes; Mounting: Compliance to IEC60068-2-6 | | | |




480W AC/DC Economical Ultra Slim Industrial DIN Rail Power **XDR-480E** series

| SPECIFICATION | XDR-480E-12 | XDR-480E-24 | XDR-480E-36 | XDR-480E-48 |
|---|--|--|-------------|--|
| SAFETY & EMC Note.6&7&8 | | | | |
| SAFETY STANDARDS | CB IEC 62368-1, IEC 61558-1/2-16, IEC 61010-1/2-201 TUV BS EN/EN 62368-1, BS EN /EN 61558-1/2-16, BS EN/EN 61010-1/2-201 UL UL/CUL 61010-1/2-201 CCC GB4943.1 BSMI CNS15598-1 EAC TPTC004 approved KC/BIS KC 62368-1 and BIS IS 13252 (Part 1) certified, no stock by request ,contact sales for inquires | | | |
| OVER VOLTAGE CATEGORY Note.4 | IEC/EN 61558-1/2-16 (OVC III, altitude up to 2000m) IEC/EN/UL 61010-1/2-201 (OVC II, altitude up to 5000m) IEC/EN 62368-1 (OVC II, altitude up to 5000m) | | | |
| SAFETY EXTRA-LOW VOLTAGE(SELV) | IEC/EN 61558-2-16 (SELV) IEC/EN 62368-1 (SELV / ES1) | | | |
| WITHSTAND VOLTAGE | I/P-O/P: 4KVac I/P-FG: 2KVac O/P-FG: 1.5KVac O/P-DC OK: 0.5KVac | | | |
| ISOLATION RESISTANCE | I/P-O/P, I/P-FG, O/P-FG: 100M Ohms/500Vdc/25°C / 70%RH | | | |
| EMC EMISSION | Parameter | Standard | | Test Level / Note |
| | Conducted | BS EN/EN55032 (CISPR32) / BS EN/EN61204-3 / CNS15936 / KS C 9832 | | Class B |
| | Radiated | BS EN/EN55032 (CISPR32) / BS EN/EN61204-3 / CNS15936 / KS C 9832 | | Class B |
| | Harmonic Current | BS EN/EN61000-3-2 | | Class A |
| | Voltage Flicker | BS EN/EN61000-3-3 | | ----- |
| EMC IMMUNITY | BS EN/EN55035 , BS EN/EN61204-3, BS EN/EN61000-6-2(BS EN/EN50082-2), KS C 9835 | | | |
| | Parameter | Standard | | Test Level / Note |
| | ESD | BS EN/EN61000-4-2 | | Level 3, 8KV air ; Level 2, 4KV contact; criteria A |
| | Radiated | BS EN/EN61000-4-3 | | Level 3, 10V/m ; criteria A |
| | EFT / Burst | BS EN/EN61000-4-4 | | Level 3, 2KV ; criteria A |
| | Surge | BS EN/EN61000-4-5 | | Level 4, 2KV/Line-Line ;Level 4, 4KV/Line-Line-Chassis ;criteria A |
| | Conducted | BS EN/EN61000-4-6 | | Level 3, 10V ; criteria A |
| | Magnetic Field | BS EN/EN61000-4-8 | | Level 4, 30A/m ; criteria A |
| OTHERS | | | | |
| MTBF | 1482.0K hrs min. Telcordia SR-332 (Bellcore) ; 258.3K hrs min. MIL-HDBK-217F (25°C) | | | |
| DIMENSION | 48*125.2*125mm (W*H*D) | | | |
| PACKING | 890g; 12pcs/13Kg/1.16CUFT | | | |
| NOTE | | | | |
| 1. All parameters NOT specially mentioned are measured at 230Vac input, rated load and 25°C of ambient temperature. 2. Ripple & noise are measured at 20MHz of bandwidth by using a 12" twisted pair-wire terminated with a 0.1 μF & 47 μF parallel capacitor. 3. Tolerance : includes set up tolerance, line regulation and load regulation. 4. The ambient temperature derating of 3.5°C/1000m with fanless models and of 5°C/1000m with fan models for operating altitude higher than 2000m(6500ft). 5. Installation clearances : 40mm on top, 20mm on the bottom, 5mm on the left and right side are recommended when loaded permanently with full power. In case the adjacent device is a heat source, 15mm clearance is recommended. 6. The power supply is considered a component which will be installed into a final equipment. The final equipment must be re-confirmed that it still meets EMC directives. (as available on https://www.meanwell.com/Upload/PDF/EMI_statement_en.pdf) 7. The Regulatory Compliance Mark (RCM) is applied on a voluntary basis. The equipment meets the relevant IEC or AS/NZS standards, or AS/NZS 3820 where applicable. The use of the RCM mark complies with AS/NZS 4417.1. 8. Some factory or model may not have the BIS logo, please contact your MEAN WELL sales for more information. ※ Product Liability Disclaimer : For detailed information, please refer to https://www.meanwell.com/serviceDisclaimer.aspx | | | | |


Block Diagram

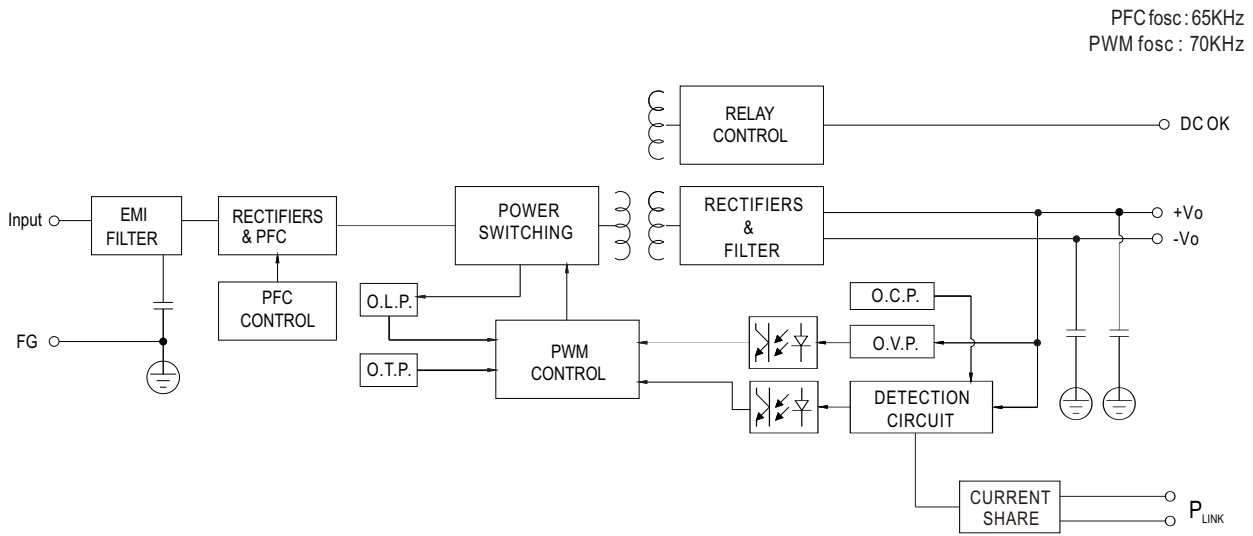

Derating Curve

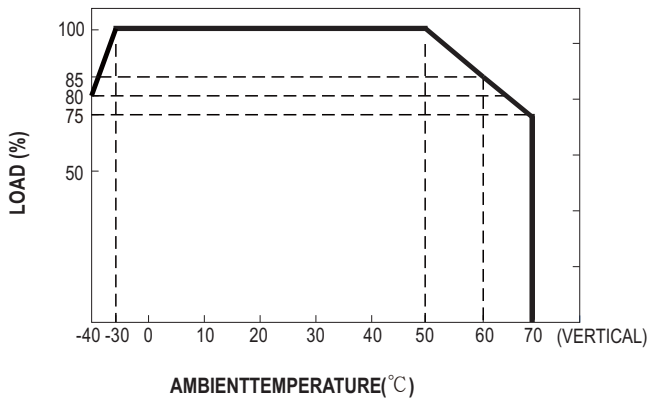

Static Characteristics

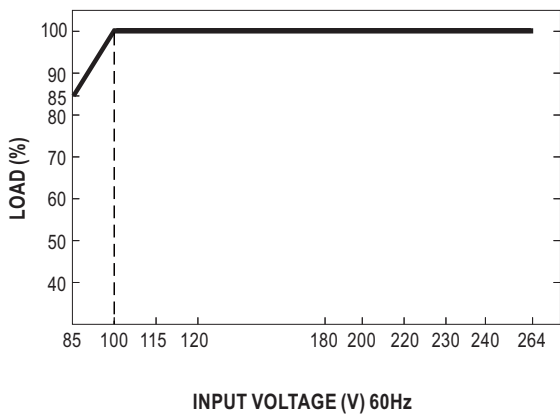


Function Manual

| Pin No. | Function | Description |
|---------|---------------------------------------|--|
| 1,2 | DC OK Relay Contact | Contact Close: PSU turns ON/DC_OK Contact Open: PSU turns OFF/DC_fail |
| 3,4 | Paraller Use Link(P _{LINK}) | P _{LINK} should be short to enable droop parallel use.(Default disable) |

1.DC OK Relay Contact

| | |
|------------------------|--------------------------------------|
| Contact Close | PSU turns ON/DC OK. |
| Contact Open | PSU turns OFF/DC Fail. |
| Contact Ratings (max.) | 30Vdc/1A, 30Vac/0.5A resistive load. |

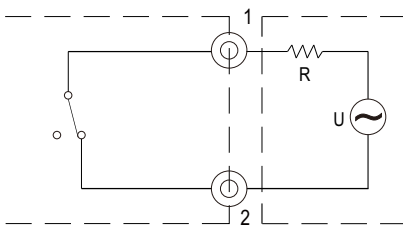

External voltage source (U) and resistor (R)
(The max. Sink is 30Vdc/1A ,30Vac/0.5A)

Internal circuit of DC_OK, via relay contact

2.Parallel Use

XDR-480E has the built-in **droop mode current sharing** function and can be connected in parallel, up to 4 units, to provide higher output power as exhibited below :




- (1) Difference of output voltages among parallel units should be less than 0.1V.
- (2) The total output current must not exceed the value determined by the following equation (Output current at parallel operation)=(The rated current per unit) x (Number of unit) x 0.9.
- (3) In parallel operation 4 units is the maximum, please consult the manufacture for other applications.
- (4) The power supplies should be paralleled using short and large diameter wiring and then connected to the load.
- (5) When in parallel operation, the minimum output load should be greater than 7% of total output load. (Min. load >7% rated current per unit x number of unit)
- (6) In parallel connection, maybe only one unit (master) operate if the total output load is less than 7% of rated load condition.
The other PSUs (slaves) may go into standby mode and their output LEDs & relays will not turn on.
- (7) P_{LINK} lines should be shorted locally.
- (8) In parallel operation,after overload or short circuit fault occurs, re-power on to recover.
- (9) The "Parallel Use" mode regulates the output voltage in such a manner that the rated load is approx. 4% lower than the no-load voltage (12V:approx.8%).

For example XDR-480E-24:


No load output voltage=24V

Normal load output current=20A

0~100% load output voltage=24V~23V

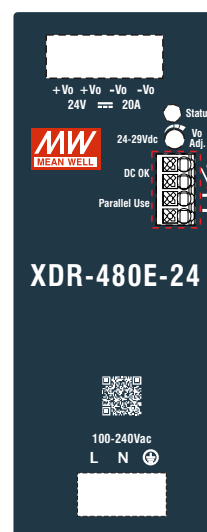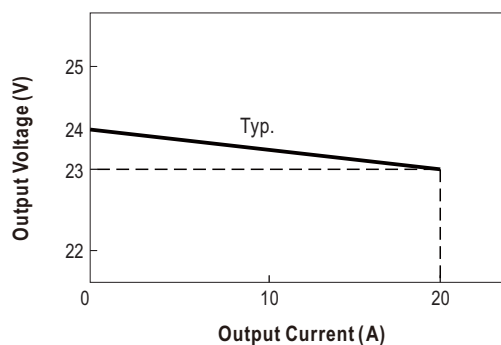

Enable : P_{LINK} should be short

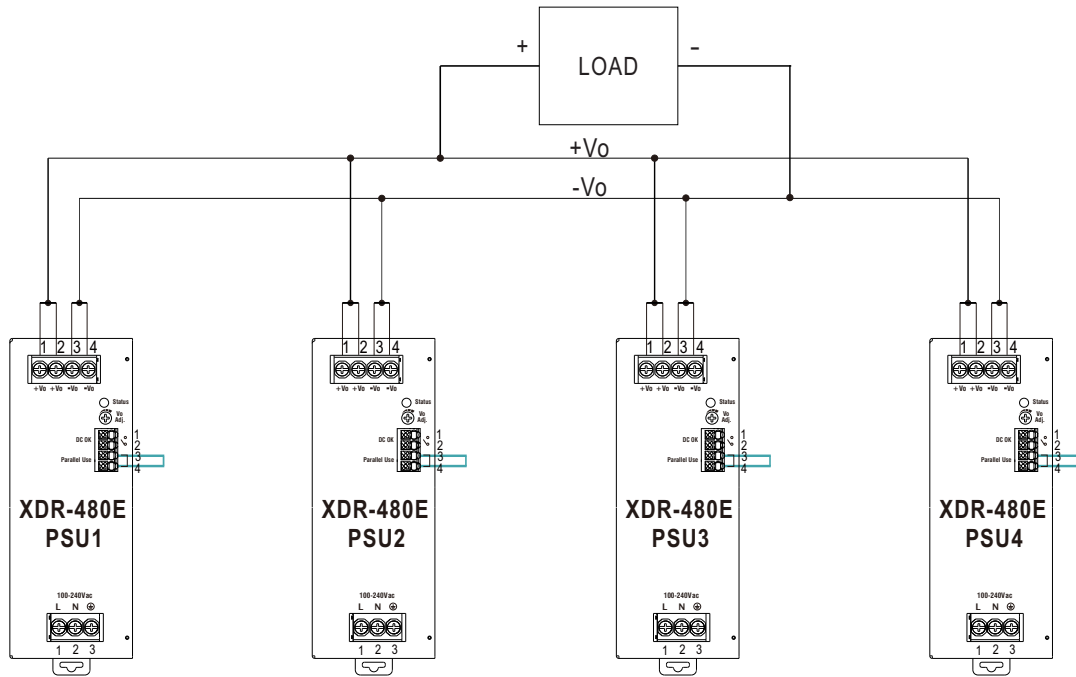


※ Please contact MEAN WELL for more details.

Mechanical Specification

(Unit:mm , Tolerance ± 1 mm)

Case No.303




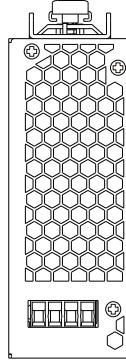


Ⓐ : Terminal Pin No.Assignment

| Pin No. | Assignment |
|---------|---------------|
| 1,2 | DC Output +Vo |
| 3,4 | DC Output -Vo |

Ⓑ : Control Pin No.Assignment

| Pin No. | Assignment |
|---------|------------------------------------|
| 1,2 | DC OK Relay Contact |
| 3,4 | Parallel Use Link(Current Sharing) |

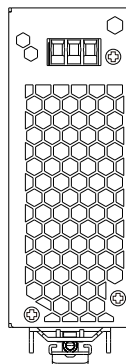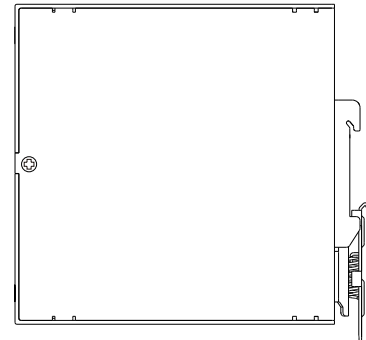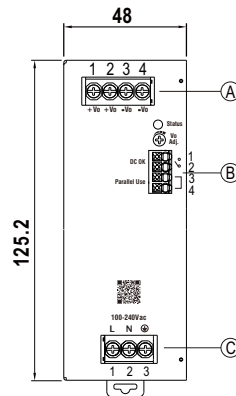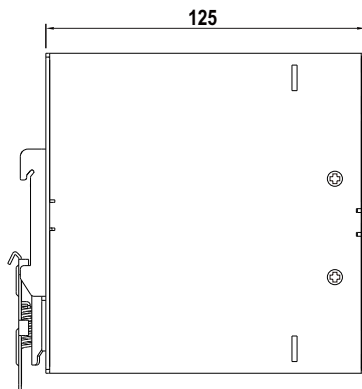


Ⓒ : Terminal Pin No.Assignment

| Pin No. | Assignment |
|---------|-----------------------|
| 1 | AC/L or DC Input +Vin |
| 2 | AC/N or DC Input -Vin |
| 3 | FG ⚡ |

Recommend Wiring

| | | AC Input T.B | DC Output T.B | Signal connector |
|-----------------------|-------------------|-----------------------|-----------------------|-------------------------|
| Solid Wire | | 6mm ² max. | 6mm ² max. | 1.5mm ² max. |
| A.W.G | XDR-480E-12 | 18~10 AWG | 12~10 AWG | 24~16 AWG |
| | XDR-480E-24/36/48 | | 16~10 AWG | |
| Wire Stripping Length | | 10~11mm | 10~11mm | 8~9mm |
| Screw Terminal Torque | | 5 Lb-In | 5 Lb-In | / |

■ Installation Instruction

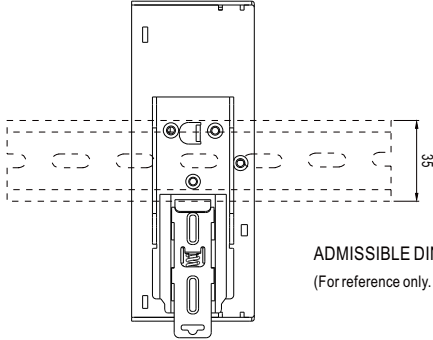

ADMISSIBLE DIN-RAIL: TS35/7.5 OR TS35/15
(For reference only. Not included with unit.)

This series fits DIN rail TS35/7.5 or TS35/15.
For installation details, please refer to the Instruction manual.

■ Installation Manual

Please refer to : <http://www.meanwell.com/manual.html>